


# S-Max™ Furan



## The Ultimate in Production Flexibility & Efficiency

The S-Max Furan, suited for sandcasting foundries, creates complex sand cores and molds directly from CAD data, eliminating the need of a physical pattern to create a core or mold. The ability to cast in hours without hard tooling improves the entire casting process chain.

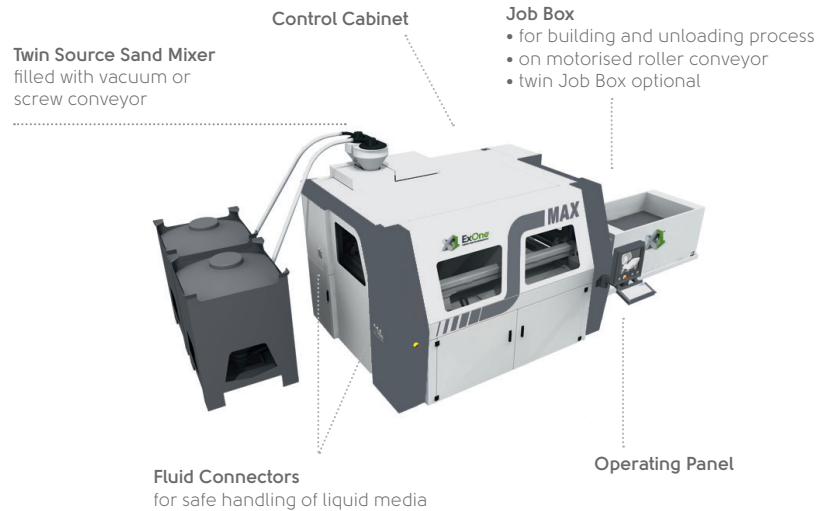

### Flexible batch production

- Each part can be different (i.e. with serial numbers)
- Changes can be made quickly
- Small production lots
- No tools and storage necessary

### High productivity

- Large Job Box
- High-speed printing
- Easy unloading
- Cores ready for immediate casting

### High accuracy

Highly accurate printing process guarantees highly accurate cores

### Suited for complex geometry

Greater design freedom

### Varied casting applications

Suited for light metals, non-ferrous metals, cast iron and steel



## TECHNICAL SPECIFICATIONS

### Process cell including job box and roller conveyor

<b>Build volume</b>	l x w x h 1800 x 1000 x 700 mm (70.9 x 39.37 x 27.56 in.)
<b>Build speed</b>	60 000 to 85 000 cm <sup>3</sup> /h (2.12 to 3.00 ft <sup>3</sup> /h)
<b>Layer thickness</b>	0.28 to 0.50 mm (0.011 to 0.0197 in.)
<b>Print resolution</b>	X/Y 0.1 mm / 0.1 mm (0.004 in. / 0.004 in.)
<b>External dimensions including one job box, right - standard</b>	l x w x h 6900 x 3520 x 2860 mm (271.7 x 138.6 x 112.6 in.)
<b>Weight</b>	6500 kg (14 330 lbs)
<b>Electrical requirements S-Max</b>	400V 3-Phase/N/PE/50-60 Hz, max. 6.3 kW
<b>Electrical requirements heater</b>	400V 3-Phase/PE/50-60 Hz, max. 10.5kW
<b>Data interface</b>	STL

## CONSUMABLE MATERIALS

- FS001:** ExOne casting media, silica sand for 0.28 mm layer thickness
- FS003:** ExOne casting media, silica sand for higher core permeability and higher layer thickness of 0.38 mm
- FS005:** ExOne casting media, silica sand for 0.50 mm layer thickness
- FA001:** ExOne Activator, matched to the chemistry and specifications of FB001
- FB001:** ExOne Binder, furan resin system optimized for low gas emissions and high part strength
- FC005:** ExOne Cleaner, required for all automated and in-process maintenance operations, dissolves FB001
- MI001:** Magnesium Inhibitor, to be used with the Mg dosing unit (available as an option) in the sand mixer, inhibits mold reactivity with magnesium

All ExOne materials and delivery systems are designed and engineered for the ExOne process and equipment. The materials include ExOne binder and activator which are specially formulated to be used with ExOne casting media.

*\*We reserve the right to change or update the information on this datasheet at any time and without prior notice. Actual systems may differ from model shown.*